




## Aluminum Units

Downdraft table or booth for grinding aluminum.  
*Meets NFPA 651 when properly used and maintained.*

SPECIFICATIONS



Booth Front View

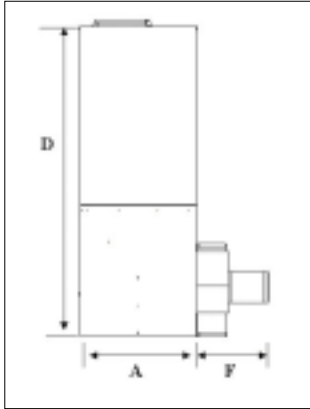

Booth Side View

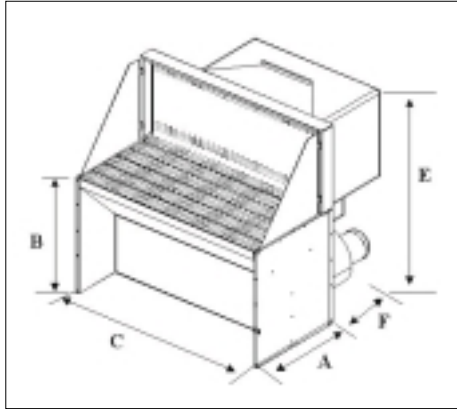


Table Front View

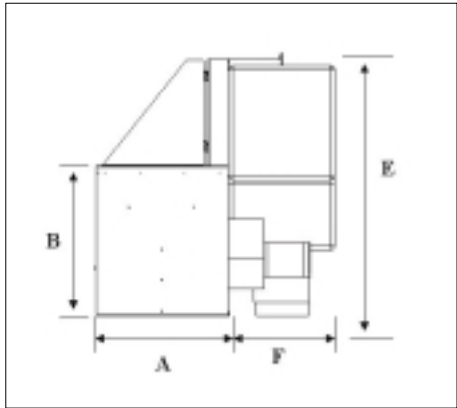


Table Side View

- Cabinet:** 16-gauge uni-body construction
- Finish:** Non-glare Electro-Galvanized
- Pre-Filter:** 24" x 24" x 4" High Efficiency pleat filter ASHRE 52.1 - 1992
- Final Filter:** 24" x 24" x 4" High Efficiency pleat filter 95% efficient to 0.5 Microns ASHRE 52.1 - 1992
- Light:** Internal fluorescent light in booths
- Dust Pan:** Removable dust pan for clean out
- Grates:** Aluminum non spark perforated table grates C-channel
- Motor:** 2 H.P. 208/220/440 three phase T.E.F.C.
- Electrical:** All included

**Standard Features**

- Ventilated Back Panel
- Self-contained Filter System
- Low Noise Level
- Toe-Leg room for operator
- Furnished Completely Assembled
- Spark Arrestors
- Blower on Clean Air Side
- Direct Drive Motor

**Options Available**

- HEPA Filters
- Carbon Filters
- Caster Systems
- Non-Spark Rubber table mats
- Welding Curtain Brackets

Model Number	Size						CFM	Horse Power	Weight	Sound Level	Avg. Face Velocity	Work Surface	Table Capacity
	A	B	C	D	E	F							
BG 3048-AL	30"	34"	48"	-	58"	18"	2000	2	450 lbs	69	200	30" x 48"	250 - 500 lbs
TB 3048-AL	30"	34"	48"	80"	-	18"	2000	2	550 lbs	69	200	30" x 48"	250 - 500 lbs
BG 3060-AL	30"	34"	60"	-	58"	18"	3000	2	550 lbs	69	240	30" x 60"	500 lbs
TB 3060-AL	30"	34"	60"	80"	-	18"	3000	2	650 lbs	69	240	30" x 60"	500 lbs

DUALDRAW reserves the right to change specifications without prior notice.

